DESIG	DRAWN BY	DART AEROSPACE LTD VICTORIA INTERNATIONAL AIRPORT, CANADA
CHECI	KED APPROVED	DRAWING NO. REV. B DSI 9080 SHEET 1 0F 1
DATE		TITLE SCALE
97.10.20		REPLACEMENT TOW RING NTS
Α	97.09.02	NEW ISSUE
В	97.10.20	REPLACE D2660 WITH D2707-041

## DART SERVICE INSTRUCTION

TO AMEND INSTALLATION DWG D205-634 REV. A & INSTALLATION DWG D204-635 REV. A REF. STA SH96-88 & STC SR00563NY

REPLACED BY

D2592 TOW RING AN4-51A BOLT AN960JD416 WASHER D2570 BUSHINGS (2) (PER INSTALLATION DWG)

OR


D2660 TOW RING AN4-47A BOLT AN960JD416 WASHER D2570 BUSHINGS (2) SUPERCEDED BY

98 69 17 05

SEE D204-635 REV. B

P205-634 REV. B

D2707-041 TOW RING AN970-4 WASHER AN960JD1016 WASHER

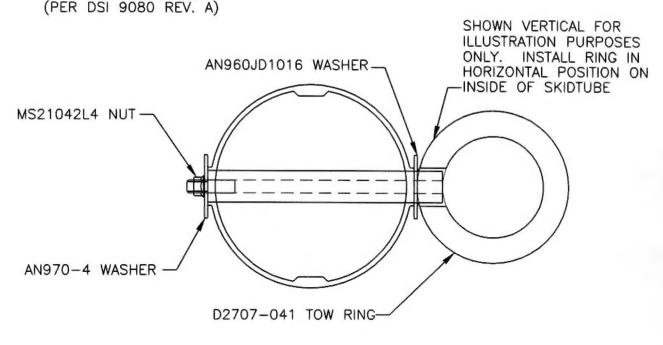

IN EARLY MODEL SKIDTUBES:

- 1. DRILL OUT TOW RING HOLE AND CROSSBOLT SPACER TO Ø0.625
- 2. TOUCH UP HOLES WITH ZINC CHROMATE PRIMER
- 3. LINE BORES WITH SIKAFLEX 241 OR EQUIVALENT SEALANT